



Telehandlers



01245 403353

JCB 525-60

Max. Lift Capacity	2.5 T
Lift Height	6 m
Machine Width	1.84 m
Machine Height	1.89 m
Machine Length to fork face	4 m

[JCB 525-60 Datasheet](#)



JCB 535-125

Max. Lift Capacity	3.5 T
Lift Height	12.07 m
Machine Width	2.35 m
Machine Height	2.59 m
Machine Length to fork face	5.8 m

[JCB 535-125 Datasheet](#)




JCB TLT 35D

Max. Lift Capacity	3.5T
Lift Height	4.4 m
Machine Width	1.28 m
Machine Height	2.2 m
Machine Length to fork Face	3 m

[JCB TLT35D Datasheet](#)



STATIC DIMENSIONS

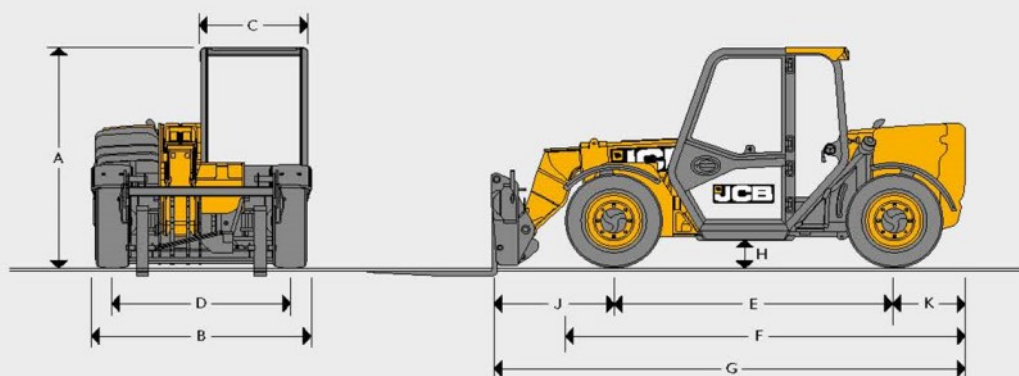


A	Overall height*	m	1.89
B	Overall width (over tyres)*	m	1.84
C	Inside width of cab	m	0.88
D	Front track	m	1.53
E	Wheelbase	m	2.39
F	Overall Length to front tyres	m	3.38
G	Overall length to front carriage	m	4
H	Ground clearance	m	0.23
J	Front wheel centre to carriage	m	1.02
K	Rear wheel centre to rear face	m	0.6
	Outside turn radius (over tyres)	m	3.7
	Carriage roll back angle	degrees	11
	Carriage dump angle	degrees	114
	Weight	kg	5230
	Tyres	industrial	12x16.5

*Dependant upon tyre specified.




LIFT PERFORMANCE

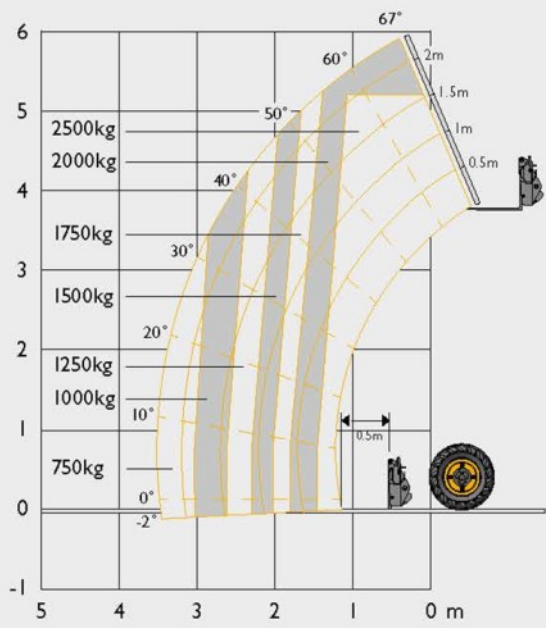

Maximum lift capacity	kg	2500
Lift capacity to full height	kg	2000
Lift capacity at full reach	kg	750
Lift height	m	6
Reach at maximum lift height	m	-0.15
Maximum forward reach (to front of carriage)	m	3.5
Complies with stability test EN1459-1		


JCB 535-125

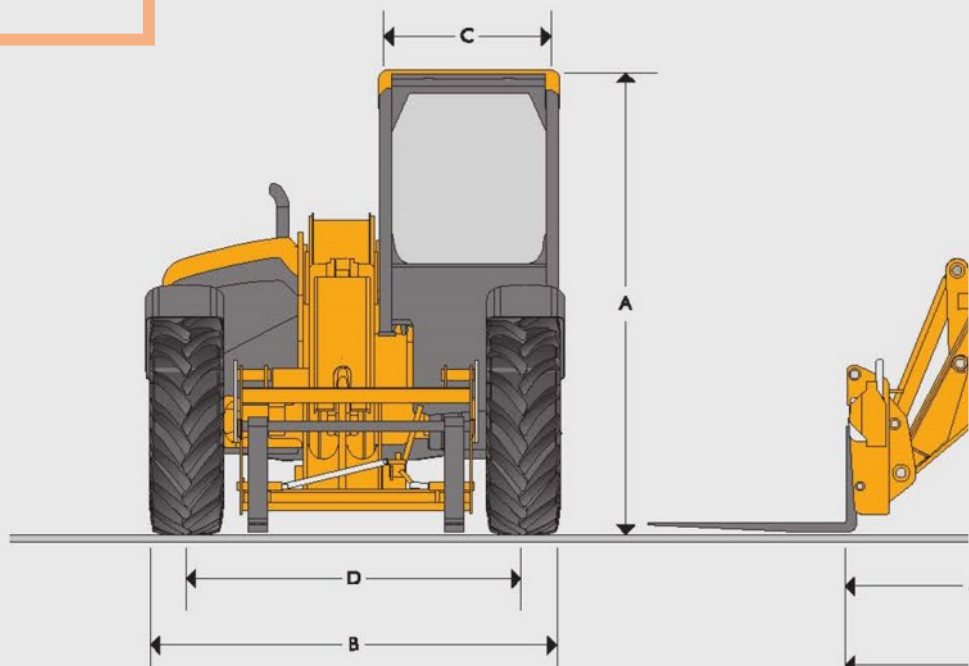

STATIC DIMENSIONS


Machine model		535-125 HiVtz
A	Overall height	m 2.59
B	Overall width (over tyres)*	m 2.35
C	Inside width of cab	m 0.94
D	Front track	m 1.90
E	Wheelbase	m 2.75
F	Overall length to front tyres	m 4.74
G	Overall length to front carriage	m 5.80
H	Ground clearance	m 0.40
J	Front wheel centre to carriage	m 1.68
K	Rear wheel centre to rear face	m 1.37
	Overall width with stabilisers fully deployed	m 2.57
	Outside turn radius (over tyres)	m 3.75
	Carriage rollback angle	degrees 37.0
	Carriage dump angle	degrees 12.5
	Weight	kg 9720
	Tyres	15.5/80-24

* Type Dependent

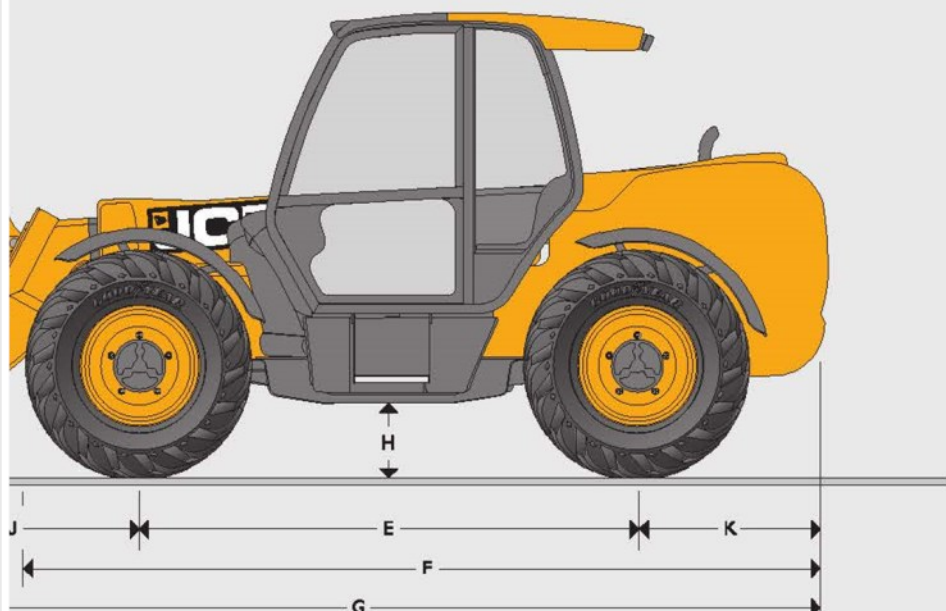


LIFT PERFORMANCE

535-125 HiViz Stabilisers retracted



535-125 HiViz Stabilisers extended



Maximum lift capacity	kg	3500	3500
Lift capacity to full height	kg	1500	3500
Lift capacity at full reach	kg	200	1150
Lift height	m	12.28	12.07
Reach at maximum lift height	m	1.36	0.46
Maximum forward reach	m	8.10	8.06
Reach with 1 tonne load	m	5.31	8.06
Placing height	m	11.43	11.75


Complies with stability test EN 1459 Annex B. Chassis Levelling (Sway) with stabilisers retracted (Sway angle $\pm 9^\circ$).



STATIC DIMENSIONS

TLT25 / TLT25HL / TLT30 / TLT30HL / TLT35

ENGINE FUEL TYPE: DIESEL OR LPG LIFT CAPACITY: UP TO 3.5 TONNES

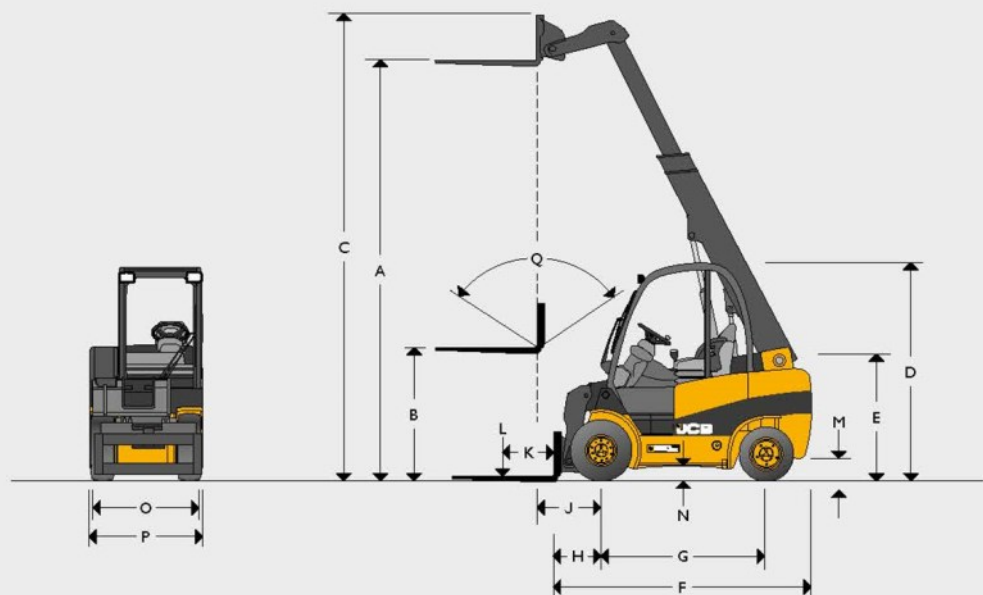

STATIC DIMENSIONS


Model		TLT35D	
A	Lift height	mm	4400
B	Free lift (standard)	mm	1410
C	Height (boom extended)	mm	4975
D	Height of overhead guard (standard/low)	mm	2205/2105
E	Height of operators seat (high/low)	mm	1200/1180
F	Length to fork face	mm	3000
G	Wheelbase	mm	1950
H	Distance from c/l of front axle to fork face	mm	595
J	Distance from c/l of front axle to fork face (full height)	mm	795
K	Load centre	mm	500
L	Lift capacities (with sideshift)	kg	3500
M	Ground clearance (lowest point)	mm	125
N	Ground clearance (wheelbase centre)	mm	155
O	Fork carriage width	mm	1200
P	Maximum width of machine	mm	1280
Q	Carriage tilt total* F/B variable through lift arc	degrees	111*

GENERAL SPECIFICATION

Model		TLT35D
Engine manufacturer		JCB Diesel by Kohler
Tier compliant		Tier 4 Stage IIIB
Engine model		KD12504TCR
Engine output (gross power)	kW	46
Cubic capacity	cm ³	2504
Rated	rpm	2600
Number of cylinders		4
Working pressure for attachments	bar	170
Oil flow for attachments	l/min	28 Std flow/70 Extra flow
Maximum reach ground level (500mm load centre)	mm	2280
Maximum reach boom horizontal (500mm load centre)	mm	2430
Turning radius	mm	2885
Aisle width 90° stacking 800 x 1200/1000 x 1200	mm	4480/4680
Weight unladen	kg	5100
Travel speed (standard)	km/h	20
Gradeability (laden/unladen)	%	25/21
Transmission		TCR
Park brake type		Hand
Shovel rated capacity	m ³	0.6
Shovel struck capacity	m ³	0.5
Shovel dump height (30°)	mm	2680
Shovel rollback angle at ground	degrees	33
Shovel width	mm	1385
Tyres PPS (semi solid), L (pneumatic)		PPS/L
Tyre size front (standard)		27 x 10 x 12
Tyre size rear (standard)		23 x 9 x 10
Diesel tank capacity	ltrs	55



LIFT CAPACITIES – TLT35D

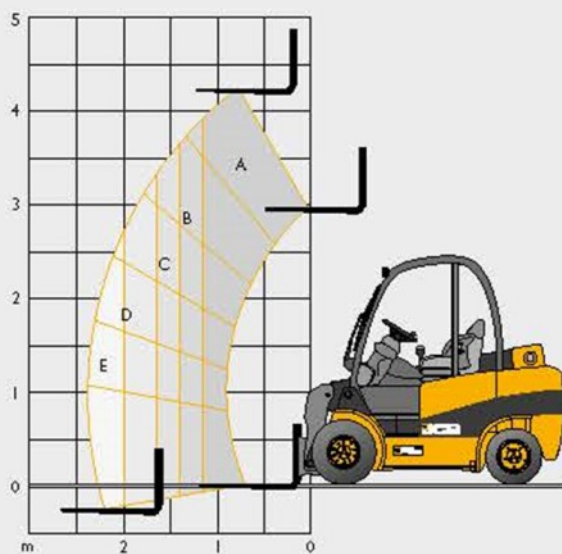

Capacity bands

TLT35

A

3500 kg

B

3000 kg

C

2500 kg

D

2100 kg

E

1700 kg

@ 2 metres

2100 kg





Seabrook Developments Ltd.
Woodlands
South Hanningfield Road
South Hanningfield
Chelmsford
Essex
CM3 8HQ

www.seabrookdevelopments.com

Please email your enquiry to the link below
admin@seabrookdev.com





01245 403353

